

Product Catalogue







Contents

Switches

Lampholders

Accessories & Adapters

Pushes

Guards & Grills


Pratley

Westinghouse Ceiling & Floor Fan Range


Established 1912...













The basis for Jeani Accessories was formed by Mr H A Murray and Mr R C Fitzgibbon using one first floor room in West London.

At that time, Fitzgibbon and Murray Ltd were making hand turned wood products for the furniture trade but as electricity became more widely available, turned wood products such as door bell pushes and bell rosettes were introduced. Gradually as demand for wood products declined, new materials with high insulation properties became available and the company grew to be one of the leading suppliers of electrical components in this country.

The Jeani Accessories trademark was given its first public showing at the British Industries Trade Fair in 1935.

It then moved to the former Horley Brewery buildings in Horley, Surrey. From humble beginnings, through two world wars, The 1930's Depression, fire and flood - Jeani Accessories Ltd joins this millennium at a new location in Derby using the long established trademark as the company name.

Celebrating over 100 years...



From humble beginnings, through two world wars, the 1930's depression, fire and flood to state of the art purpose built facilities.

Welcome to Jeani.

3 Great brands under one roof - over 100 years of service.

Foot In-Line Press Pull Door

Foot Switches



706B

- Foot Switch
- 2 Amp
- Black



706W

- Foot Switch
- 2 Amp
- White



706G

- Foot Switch
- 2 Amp
- Gold

In-Line



701B

- Single Pole
- 2 Amp
- Black



701W

- Single Pole
- 2 Amp
- White



701G

- Single Pole
- 2 Amp
- Gold



701BR

- Single Pole
- 2 Amp
- Brown



702B

- Double Pole
- 10 Amp
- Black



702W

- Double Pole
- 10 Amp
- White



702BR

- Double Pole
- 10 Amp
- Brown

Press Switches



703B NEW

- Press Switch
- 2 Amp
- Black



703

- Press Switch
- 2 Amp
- White

Pull Switches



707C

- Pull Switch
- 6 Amp
- Chrome



708

- Pull Switch
- 2 Amp
- White Pull Cord and Toggle



709

- Pull Switch
- 2 Amp
- Centre Pull
- White Pull Cord and Toggle



708C

• White Pull Cord For 708



708S

 Insulating/Isolating Shroud for 708

Door Switches



140WB

- · Flush Mounting
- Push to Break
- C/W Back Box
- 1 Amp/230 Volt
- Brass Plate



140AWB

- · Flush Mounting
- Push to Make
- C/W Back Box
- 1 Amp/230 Volt
- Brass Plate



140WBC

- Flush Mounting
- Push to Break
- C/W Back Box
- 1 Amp/230 Volt
- Chrome Plate



140AWBC

- · Flush Mounting
- Push to Make
- C/W Back Box
- 1 Amp/230 Volt
- Chrome Plate



140LP

- Flush Mounting
- Push to Break
- 1 Amp/230 Volt
- Brass Plate



140ALP

- Flush Mounting
- Push to Make
- 1 Amp/230 Volt





140LPC

- Flush Mounting
- Push to Break
- 1 Amp/230 VoltChrome Plate



140ALPC

- Flush Mounting
- Push to Make
- 1 Amp/230 Volt
- Chrome Plate



140 BOX

 Back Box for Flush Models 140LP, 140ALP, 140LPC & 140ALPC



141WB

- · Flush Mounting
- · Push to Break
- 2 Amp/250 Volt
- · Brass Plate

Suitable for all door types including sliding doors.



141AWB

- · Flush Mounting
- · Push to Make
- 2 Amp/250 Volt
- · Brass Plate

Suitable for all door types including sliding doors.



141WBC

- · Flush Mounting
- · Push to Break
- 2 Amp/250 Volt
- Brass Plate

Suitable for all door types including sliding doors.



141AWBC

- · Flush Mounting
- · Push to Make
- 2 Amp/250 Volt
- · Brass Plate

Suitable for all door types including sliding doors.



142

- Surface Mounting
- Push to Break
- C/W Safety Cover
- 1 Amp/230 Volt
- Black Plastic



142A · Surface Mounting

- · Push to Make
- · C/W Safety Cover
- 1 Amp/230 Volt
- Black Plastic



142W

- · Surface Mounting
- Push to Break
- C/W Safety Cover
- 1 Amp/230 Volt
- · White Plastic



142AW

- · Surface Mounting
- Push to Make
- · C/W Safety Cover
- 1 Amp/230 Volt
- · White Plastic



143

- Surface Mounting
- · Push to Break
- 2 Amp/250 Volt
- Black Plastic

Suitable for all door types including sliding doors.



143A

- · Surface Mounting
- · Push to Make
- 2 Amp/250 Volt
- Black Plastic

Suitable for all door types including sliding doors.



143W

- Surface Mounting
- · Push to Break
- 2 Amp/250 Volt
- White Plastic

Suitable for all door types including sliding doors.



143AW

- · Surface Mounting
- · Push to Make
- 2 Amp/250 Volt
- White Plastic

Suitable for all door types including sliding doors.



- Surface Mounting
- · Push to Break
- 2 Amp
- · Long Pin 22mm
- Black Plastic

144W

- Surface Mounting
- 2 Amp Long Pin 22mm



- · Push to Make
- Black Plastic

Edison Screw
Small Edison Screw
Bayonet Cap
Small Bayonet Cap
Miscellaneous



Edison Screw



Edison Screw, ES, E27 Cap Fitment. **ES - E27**



A40

- Screw Terminals
- Porcelain/Ceramic



A41

- 10mm Entry
- Plain Liner
- · Black Plastic



A41W NEW

- 10mm Entry
- Plain Liner
- · White Plastic



A41G NEW

- 10mm Entry
- Plain Liner
- · Gold Plastic



A41B

- 10mm Entry
- Plain Liner
- Brass Finish



A41C

- 10mm Entry
- Plain Liner
- Chrome Finish



A41AB NEW

- 10mm Entry
- Plain Liner
- · Antique Brass Finish



A42

- 10mm Entry
- · Shade Ring
- Black Plastic



A42W NEW

- 10mm Entry
- Shade Ring
- White Plastic



A42G NEW

- 10mm Entry
- · Shade Ring • Gold Plastic



- 10mm Entry
- Shade Ring
- Chrome Finish



A42B

- 10mm Entry
- · Shade Ring
- Brass Finish



- A42AB NEW • 10mm Entry
 - Shade Ring
 - Antique Brass Finish



A42BN NEW

- 10mm Entry
- Shade Ring
- · Black Nickel Finish



A42AC NEW

- 10mm Entry
- · Shade Ring
- Antique Copper Finish



A42BC NEW

- 10mm Entry
- · Shade Ring
- Bright Copper Finish



Shade Rings NEW

- A42SCB Brass
- A42SCBC
- · Bright Copper A42SCBN
- · Black Nickel

A42SCAB

- Antique Brass A42SCC
- Chrome A42SC
- Black Plastic

A42SCAC

- Antique Copper A42SCG
- · Gold Plastic A42SCW
- · White Plastic



- Moulded
- Screw Fix
- Black Plastic



A44

- 1/2" Entry
- Shade Ring
- Brass



A45

- Batten Type
- Shade Ring
- Brass



A45WB

- Batten Type
- White Plastic



A45WBB

- Batten Type
- Black Plastic



A45WAB

- Angled
- Batten Type
- White Plastic



A45WABB

- Angled
- Batten Type
- Black Plastic



1/6

- Cord Grip Type
- Shade Ring
- Brass



A47

- Shade Ring
- Brass



Δ48

- 1/2" Entry
- Plain Liner
- Brass



A49

20mm Entry

- Shade Ring
- Brass



A60

- Festoor
- Black Plastic
- C/W IP44 Rated Gaskets





Small Edison Screw, SES, E14 Cap Fitment. SES - E14



A101

- 10mm Entry
- Plain Liner
- Brass



- 10mm Entry
- Threaded LinerBlack Plastic



A103W NEW

- 10mm Entry
- Threaded Liner
- White Plastic



A103G NEW

- 10mm Entry
- Threaded Liner
- Gold Plastic



A103AB NEW

- 10mm Entry
- Threaded Liner
- Antique Brass



A103BN NEW

- 10mm Entry
- Threaded Liner
- Black Nickel



A103AC NEW

- 10mm Entry
- · Threaded Liner
- Antique Copper



A103BC NEW

- 10mm Entry
- Threaded Liner
- Bright Copper



A104

- SES
- Shade for A103
- Black Plastic



A104W

- SES
- Shade for A103
- White Plastic



A104G

- SES
- Shade for A103
- Gold Plastic



A105

- 10mm Entry
- Plain Liner
- Black Plastic



A105W NEW

- 10mm Entry
- Plain Liner
- White Plastic



A105G NEW

- 10mm Entry
- Plain Liner
- · Gold Plastic

Bayonet Cap



Bayonet, BC, B22 Cap Fitment. BC - B22



A38

- 1/2" Entry
- Switched
- · Shade Ring
- Brass



A38M

- 10mm Entry
- Switched
- · Shade Ring
- Brass



A38C

- 1/2" Entry
- Switched
- Shade Ring • Chrome



A38MC

- 10mm Entry
- Switched
- · Shade Ring
- Chrome



A38AB

- 1/2" Entry
- Switched
- Shade Ring Antique Brass



A50

- 1/2" Entry
- Switched
- BC Lampholder
- · White Plastic



A50M

- 10mm Entry
- Switched
- BC Lampholder
- · White Plastic



A50B

- 1/2" Entry
- Switched
- BC Lampholder
- Black Plastic



- 1/2" Entry
- BC Lampholder
- White Plastic



A51B

- 1/2" Entry
- BC Lampholder
- Black Plastic



A52

- Cord Grip Type
- BC Lampholder
- White Plastic



A53

- 10mm Entry
- BC Lampholder
- White Plastic



A53B

- 10mm Entry
- BC Lampholder
- Black Plastic



A54

- Snap Fix/Screw Fix
- White Plastic
- Moulded



Δ55

- 10mm Entry
- Snap-On Insulating Cap for A54



A56

• Push on Shroud for A54



Δ57

- Porcelain/Ceramic
- Screw Terminals



A57B

- Porcelain/Ceramic
- Batten Type



A57FB

- BC Screw Terminals
- Porcelain/Ceramic
- 90° Angle



A70

- 1/2" Entry
- Shade Ring
- Brass



A70M

- 10mm Entry
- Shade Ring
- Brass



A70C

- 1/2" Entry
- Shade Ring
- Chrome



A70MC

- 10mm Entry
- Shade Ring
- Chrome



A70AB

- 1/2" Entry
- Shade RingAntique Brass



A70ABM

- 10mm Entry
- Shade Ring
- Antique Brass



A73

- 20mm Entry
- Shade Ring
- Brass



A76

- 1/2" Entry
- Plain Liner
- Brass



- Plastic Cord Grip
- Shade Ring
- Brass



A80/SP

- Cord Grip
- Shade Ring
- Brass



A82

- Batten Type
- 3 Hole Fixing
- Shade Ring
- Brass



A83

- Batten Type
- 2 Hole Fixing
- Shade Ring
- Brass



A102

- 10mm Entry
- Candle Type
- Brass

Small Bayonet



Small Bayonet, SBC, B15 Cap Fitment.



۸۵۶

- 1/2" Entry
- Shade Ring
- Brass



A96M

- 10mm Entry
- Shade Ring
- Brass



ΛΩ7

- Cord Grip Type
- Shade Ring
- Brass



And

- Batten Type
- Shade Ring
- Brass



A99

- 3/8" Entry
- Plain Liner
- Brass



A99M

- 10mm Entry
- Plain Liner
- Brass



A100

- 1/2" Entry
- Plain Liner
- Brass

Giant Edison Screw



Giant Edison Screw, GES - E40



A107

- Porcelain/Ceramic Lampholder
- C/W Bracket Screw Terminals

Miscellaneous Lampholders



A10

- T12
- G13
- Fluorescent Push on Lampholder



A11

- T8
- G13
- Fluorescent Push on Lampholder



A12

- 2G11
- · Vertical/Horizontal
- Screw Fix
- Adjustable



A13

- T5
- GU13
- Tombstone
- Snap Fix/Screw Fix



A14

- T8/T12
- GU13
- End Screw Fix
- · Locating Hole



A15

- T8/T12
- GU13
- End Screw Fix with Spring



A15B

 Metal Bracket For A14 and A15



A16

- GX5.3
- Low Voltage
- 140mm PTFE Ferruled Leads



A17

- GX4
- Low Voltage
- 140mm Silicone Ferruled Leads



A18

- GU5.3
- Low Voltage
- 140mm PTFE Ferruled Leads



A19

- RX7S
- Screw Fix
- 270mm PTFE Ferruled Leads



A20

- RX7S
- Screw Fix
- 400mm Silicone Ferruled Leads



A21

- R7S
- Complete With Bracket
- 220mm PTFE Ferruled Leads



A22

- G9
- Screw/Snap Fix
- Pushwire



A22C

- G9
- 10mm EntryThreaded Cap



A23

- GU10/GZ10
- Lampholder with 25cm Silicone Tails



DLESP*

- PLC 4 Pin
- 240V 10-18W

*Lamp Not included

e: sales@jeani.co.uk w: jeani.co.uk

Accessories & Adapters



Adapters

Adapters



JABCES

- BC to ES Adapter
- Black



JABCESW

- BC to ES Adapter
- White



JABCGU10

• BC to GU10 Adapter



JABCSBC

BC to SBC Adapter



JABCSES

BC to SES Adapter



JAESBC

- ES to BC Adapter
- Black



JAESBCW

- ES to BC Adapter
- White



JAESG9

• ES to G9 Adapter



JAESGU10

• Es to GU10 Adapter



JAESLV

 ES to GU5, 3 & GY6.35 Adapter



JAESSES

• ES to SES Adapter



JAGESES

· GES to ES Adapter



JASBCSES

• SBC to SES Adapter



JASESES

• SES to ES Adapter



JASESG9

• SES to G9 Adapter



JASESGU10

• SES to GU10 Adapter

Accessories



JSB

- · Starter Base
- Screw Fix



JSU

- Universal Starter
- 4-80 Watt



JSS

- Series Starter
- 2-22 Watt



JLS2G11

- Lamp Support
- 2G11
- Adjustable
- Screw Fix



JLSG23

- G23
- · Lamp Support
- Adjustable
- Screw Fix



JLC8

- T8
- 25mm/1"
- Lamp/Spring Terry Clip

Cord grips

Screw Fix



JLC5

- T5
- 16mm/5/8"
- Lamp/Spring Terry Clip Screw Fix



450W

- 137 X 137mm
- Finger Plate
- White
- Packs of 10



450C

- 137 X 137mm
- Finger Plate
- Clear
- Packs of 10



161/162

- 10mm Grommet
- 13mm Grommet
- Clear Plastic
- Packs of 25 or 100



163

- 10mm Female Thread
- Grub Screw
- Black Plastic
- Packs of 25 or 100



163W

- 10mm Female Thread
- Grub Screw
- · White Plastic
- Packs of 25 or 100



164

- 10mm Male Thread
- Black Plastic
- Packs of 25 or 100



164W

- 10mm Male Thread
- White Plastic
- Packs of 25 or 100



167

- 10mm Male Thread
- Grub Screw
- Black Plastic
- Packs of 25 or 100



167W

- 10mm Male Thread
- Grub Screw
- White Plastic
- Packs of 25 or 100

Brass parts



Couplers

- **556** 1/2"
- **557M** 10mm
- 560 1/2" Shaped
- Packs of 25 or 100



Black Plates

- **501** 1/2"
- **502** 10mm
- 503 13mm
- Packs of 25 or 100



Reducers

- 507 13mm x 10mm
- **510** 1/2" x 5/16"
- **511** 1/2" x 3/8"
- **511M** 1/2" x 10mm
- **512** 5/8" x 1/2"
- Packs of 25 or 100



Washers

- 540 3/8"I.D.
- **541 -** 1/2"I.d.
- 540A 3/8"I.D. Fibre
- 541A 1/2" I.D. Fibre
- Packs of 25 or 100



Ring Nuts

- **545** 3/8"
- 545M 10mm
- **546** 1/2"
- Packs of 25 or 100



Hex Nuts

- **549** 1/2"
- **550** 3/8"
- **551** 1/2"
- **551M** 13mm
- Packs of 25 or 100 •



Wood Nipples

- **504** 1/2" x 7/16" Whitworth
- **505** 10mm x 7/16" Whitworth
- Packs of 25 or 100



All thread 1m long

• 530S - 10mm steel



All thread 10mm ø

- 513M -13mm Long
- **514M** 19mm Long
- 515M 25mm Long
- **520M** 50mm Long • **521M** - 75mm Long
- Packs of 25 or 100



All thread 1/2" ø

- 525 1/2" Long
- **526** 3/4" Long
- 527 1" Long
- 528 2" Long
- 529 3" Long
- Packs of 25 or 100

Hooks, Hook plates & Chains



404

- 1/2" Male Thread
- Brass Hook
- Packs of 25 or 100



405

- 1/2" Female Thread
- Brass Hook
- Packs of 25 or 100



406

- 10mm Male Thread
- Brass Hook
- Packs of 25 or 100



407

- 10mm Female Thread
- Brass Hook
- Packs of 25 or 100

Hooks, Hook plates & Chains



404C

- 1/2" Male Thread
- Chrome Hook



405C

- 1/2" Female Thread
- Chrome Hook



406C

- 10mm Male Thread
- Chrome Hook



407C

- 10mm Female Thread
- · Chrome Hook



400BRA

- Hook Plate
- Brass



400CHR

- Hook Plate
- Chrome



All chain comes in a minimum of 10 metres

406PB

398PB

- 3/4" Oval Link
- Brass Chain

398PC

- 3/4" Oval Link
- Chrome Chain

401PB

- 1/2" Oval Link
- Brass Chain

401PC

- 1/2" Oval Link
- Chrome Chain

402PB

- 3/8" Oval Link
- Brass Chain

402PC

- 3/8" Oval Link
- Chrome Chain

403PB

- 5/8" Oval Link
- Brass Chain

Chain •

1" Oval LinkBrass Chain

403PC

- 5/8" Oval Link
- Chrome Chain

406PC

- 1" Oval Link
- Chrome Chain

Fuses



JF1

- 1 Amp Fuse
- Packs of 25 or 100



JF3

- 3 Amp Fuse
- Packs of 25 or 100



JF5

- 5 Amp Fuse
- Packs of 25 or 100



JF10

- 10 Amp Fuse
- Packs of 25 or 100



JF13

- 13 Amp Fuse
- Packs of 25 or 100

Plug Tops



JPT2A

- 2 Amp
- White
- Round Pin Plug Top



JPT2AB

- 2 Amp
- Black
- Round Pin Plug Top



JPT5A

- 5 Amp
- White
- Round Pin Plug Top



JPT5AB

- 5 Amp
- Black
- Round Pin Plug Top



JPT13A

- 13A 13A Fused
- White
- 3 Pin Plug Top
- BS 1363



JPT13AB

- 13A 13A Fused
- Black
- 3 Pin Plug Top
- BS 1363



JPT13A/3A

- 13A 3A Fused
- White
- 3 Pin Plug Top
- BS 1363



JPT13AB/3A

- 13A 3A Fused
- Black
- 3 Pin Plug Top
- BS 1363

Transformers



JBT012

- 230V to 4/8/12V
- 1 Amp
- Surface Type



JDT208

- 230V to 8V
- 1 Amp
- 2 Module Din Rail



JDT381224

- 230V to 8/12/24V
- 1 Amp
- 3 Module Din Rail



JPTSHUKOW

 Shuko Re Wireable plug Top

Pushes

Barrel **Multi-gang** Plastic **Pendant Door Contact Door Chimes** t: 01332 865055

f: 01332 865056

Pushes

Barrel Type Bell Pushes

Low Voltage Circuits Only (Maximum 12V)



365

- Brass Barrel & Push
- 16mm Diameter Hole



366

- Chrome Barrel & Push
- 16mm Diameter Hole

Multi Gang Bell Pushes

Low Voltage Circuits Only (Maximum 12V)



2727A

- Plastic Surface
- . White
- Strips Of Ten
- Single Unit 90x32x18mm



3737A

- Plastic Surface
- White
- Single Unit -90x32x18.5mm
- Illuminated

Plastic Bell Pushes

Low Voltage Circuits Only (Maximum 12V)



KK02001

- Plastic Surface
- White
- 25x65x20mm
- White Push



KK02001L

- Plastic Surface
- White
- 25x65x20mm
- Clear Push
- Lifetime Illuminated Led



PB01 NEW

- Plastic Surface
- White Curve
- vviile Curve25x65x20mm
- Z5X65X20mlWhite Push
- Lifetime Illuminated Led



PB02 NEW

- Plastic Surface
- Black Smoke
- 25x65x20mm
- Clear PushLifetime Illuminated Led



PB03W NEW

- Plastic Surface
- White
- 25x65x20mm
- White Push
- Lifetime Illuminated Led



PB03B NEW

- Plastic Surface
- Black
- 25x65x20mm
- White Push
- · Lifetime Illuminated Led

Pushes



NEW PB04

Plastic - Surface

- White
- 25x65x20mm
- White Push
- · Lifetime Illuminated Led



PB04W NEW

- Plastic Surface
- White
- 25x65x20mm
- White Push
- Lifetime Illuminated Led



PB04B NEW

- Plastic Surface
- Black
- 25x65x20mm
- White Push
- · Lifetime Illuminated Led



PB09G NEW

- Metal Surface
- Brass
- 25x65x20mm
- Brass Push
- · Lifetime Illuminated Led



PB09S NEW

- Metal Surface
- Chrome
- 25x65x20mm
- Chrome Push
- Lifetime Illuminated Led



PB75G NEW

- Metal Surface
- Brass
- 25x65x20mm
- Brass Push
- · Lifetime Illuminated Led



PB75S NEW

- Metal Surface
- Chrome
- 25x65x20mm
- Chrome Push
- Lifetime Illuminated Led

Pendant Push

Low Voltage Circuits Only (Maximum 12V)



108

- Max 12V
- Hospital Type
- Ivor
- Plastic Push With Skirt

Door Contact

Low Voltage Circuits Only (Maximum 12V)



394

- Max 12V
- Over Door Contact
- Makes Contact when Door Opens
- Makes Contact when Door Closes

Door Chimes



165BW


- 2 Note/85dB
- 12V External Transformer or Internal Battery Operated
- 118x118x47mm
- White



169TRW

- 2 Note/85dB
- Built In Transformer Operated
- 169x104x49mm
- White

Guards & Grills

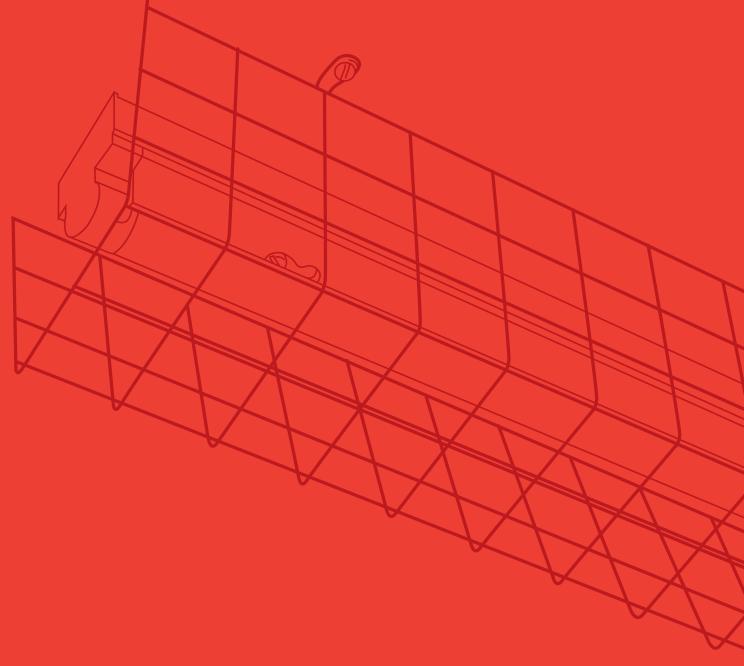


Guards & Grills


A complete range of guards and grills to suit the majority of exterior luminaries and closed circuit TV camera systems.

Our welded wire guards and grills are constructed from either 25mm or 50mm steel weld mesh and finished in black/white epoxy polyester electrostatic powder coating, baked in our ovens at 180°c to give a tough weatherproof finish.

The entire range would normally be sited for use in the protection of sports halls, schools, unoccupied buildings and areas of high incidents of vandalism, such as sports grounds, car parks, stations and shopping centres.








GC01

- Suitable for 500w PIR floods 70w SON & small camera housings
- 50mm Mesh Size




- Suitable for large bell boxes energy saving bulkheads
- 50mm Mesh Size



















GC03

- Suitable for low profile bell boxes
- 50mm Mesh Size

GC04

- Suitable for 500w floods PL flood external and internal PIRS
- 50mm Mesh Size

GC05

- Suitable for bulkheads PIR bulkheads and emergency lighting
- 50mm Mesh Size


GC06

- Suitable for CCTV/ cameras discharge area floodlights
- 50mm Mesh Size

GC07

- Suitable for CCTV/ cameras discharge area floodlights
- 50mm Mesh Size






GC08


- Suitable for PIR Smoke Detector
- 25mm Mesh Size






GC09

- Suitable for ext.
 PIR Smoke Detector
- 25mm Mesh Size






GC10

- Suitable for Corner PIR Guard
- 25mm Mesh Size







GC11

- Black Grill
- 50mm Mesh Size


Guards & Grills

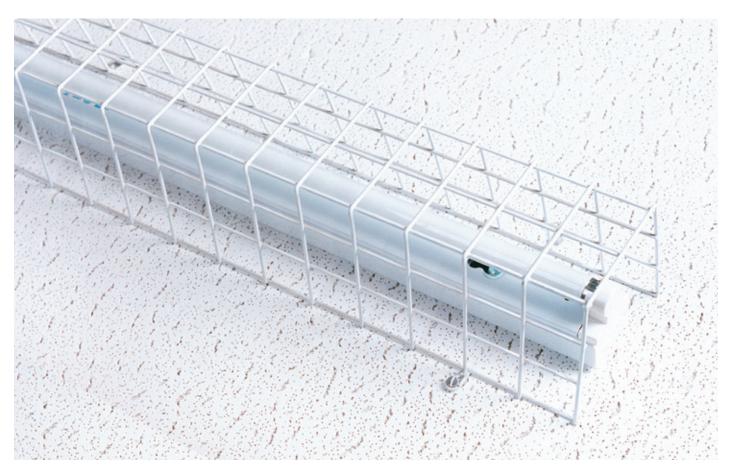




GF12

- 2' Single Guard (Fluorescent)
- Open ended for continuous runs
- 50mm Mesh Size




GF22

- 2' Twin Guard (Fluorescent)
- 50mm Mesh Size




GF14

- 4' Single Guard (Fluorescent)
- 50mm Mesh Size




GF24

- 4' Twin Guard (Fluorescent)
- 50mm Mesh Size




GF15

- 5' Single Guard (Fluorescent)
- 50mm Mesh Size




GF25

- 5' Twin Guard (Fluorescent)
- 50mm Mesh Size



GF16

- 6' Single Guard (Fluorescent)
- 50mm Mesh Size




GF26

- 6' Twin Guard (Fluorescent)
- 50mm Mesh Size



GF18

- 8' Single Guard (Fluorescent)
- 50mm Mesh Size



GF28

- 8' Twin Guard (Fluorescent)
- 50mm Mesh Size



Full colour Pratley catalogue available on request.



Ezee-Fit (Non-Corrosive) IP68 Cable Junction Box



Features & Benefits

- Built-in Ex E cable glands
- Ex E and Ex N dual certified
- · Quick and easy to fit
- Reinforced, impact and corrosion resistant thermoset material
- Unique encapsulated earth bar ensures earth continuity to all entries
- Internal earth stud
- Accommodates either armoured or un-armoured cables of various sizes
- · Numerous accessories available
- IP68 for total water and dust ingress protection
- Suitable for aggressive environments and burying underground (Orange can be supplied on request)

Specifications

SWA/PVC Cable Box Selection Chart

Cable Size	No. of Cores	Box Size Max.	Bedding Dia. (Hole Ø in box entry)
1.5mm ²	2, 3, 4, 5, 7	0	12.6mm
	12	1	15.7mm
	19	2	20.4mm
	27, 37	3	26.3mm
2.5mm ²	2, 3, 4, 5	0	12.6mm
	7	1	15.7mm
	12	2	20.4mm
	19, 27	3	26.3mm
	37	4	34.7mm
4mm ²	2, 3, 4	0	12.6mm
	5, 7	1	15.7mm
	12, 19	3	26.3mm
	27	4	34.7mm
	37	5	43.3mm
6mm ²	2	0	12.6mm
	3, 4, 5	1	15.7mm
	7	2	20.4mm
10mm ²	2, 3	1	15.7mm
	4	2	20.4mm
16mm ²	2	1	15.7mm
	3, 4	2	20.4mm
25mm ²	2	1	15.7mm
	3	2	20.4mm
	4	3	26.3mm
35mm ²	2	2	20.4mm
	3, 4	3	26.3mm
50mm ²	2	2	20.4mm
	3, 4	3	26.3mm
	4	4	34.7mm
70mm ²	3, 4	4	20.4mm
95mm ²	3	4	34.7mm
	4	5	43.5mm
120mm ²	3	4	34.7mm
	4	5	43.3mm

This chart shows the maximum cable bedding diameter accommodated by each size of Junction Box.

NOTE: Cable Size, No of Cores and Box Size are based upon sizes published by cable manufacturers. Cable diameters do vary. To be 100% sure, physically measure the bedding size and then select the appropriate box.





Ezee-Fit sizes & configurations See size selection chart

Size	Box Entry Thread	Box Configuration	Cat. No.
No. 0	20mm x 1.5p	Two Way Through Box Three Way 'T' Box Four Way Right Angle	56200 56202 56204
No. 1	25mm x 1.5p	Two Way Through Box Three Way 'T' Box Four Way Right Angle Three Way P/E Y-Type	56206 56208 56212 56210
No. 2	32mm x 1.5p	Two Way Through Box Three Way 'T' Box Four Way Right Angle Three Way P/E Y-Type Four Way P/E H-Type	56214 56216 56220 56218 56222
No. 3	40mm x 2p	Two Way Through Box Three Way 'T' Box Four Way Right Angle Three Way P/E Y-Type	56224 56226 56230 56228

SpecificationsJunction Box Dimensions (Right Angle Entry box)

Size	Α	В	С		D	E		Н	I	J	PCD	L	M	P	R	S
	Entry Thread	Across	Overall F	leight	Internal	Overall F	leight		Bore	Lid			Trapped Earth	Rail		
		Entries	STD Lid	PC Lid	Dia.	STD Lid	PC Lid			Height			Stud Hole	Length		
0	20 x 1.5p	144.8	62.0	75.0	89.0	46.5	67.1	18.2	12.6	26.0	109.0	18.2	M4 x 6.0	80.0	22.5	48.5
1	25 x 1.5p	169.5	75.6	84.0	98.0	49.9	73.2	21.6	15.7	28.6	118.0	21.6	M4 x 6.0	80.0	25.4	53.1
2	32 x 1.5p	201.8	104.4	98.2	123.0	76.6	85.2	26.3	20.4	47.9	145.0	26.3	M4 x 8.0	108.0	31.8	65.1
3	40 x 1.5p	271.0	132.9	133.0	175.4	110.1	115.3	33.8	26.3	69.2	196.0	33.8	M8 x 8.0	150.0	47.6	85.7
4	50 x 2.0p	323.6	145.2	145.3	224.7	119.2	125.5	36.1	34.7	70.6	248.5	39.2	M8 x 8.0	150.0	60.3	108.7

Aluminium Alloy (Corrosion Resistant) IP68 Cable Junction Box

IP68 Cable Junction Box

All boxes are supplied standard with built-in glands for SWA cable. Available in three sizes, No 0, 1 and 2, which will accommodate cables from 1.5 mm x 2 core to 16 mm x 4 core. Each size is available in a Two way through box, Three way right angle box and a Four way right angle box. In addition the No. 1 box is available in a Three way Y-type parallel and Four way H-type parallel entry configuration.

Features & Benefits

- Reducing Gland and Reducing Shroud to accommodate smaller size cables
- Mounting Lugs
- Replaceable Gasket
- Full range of box sizes and configurations
- Compression Conversion Kit for un-armoured cable
- Brass Earthing Screw (Optional)
- External Earth Lug
- Built-in Glands for Armoured Cable (no need to order)
- End Connectors and Sleeves
- · Stainless Steel Lid Screws
- Epoxy coated Corrosion resistant lightweight, strong & impact resistant
- Not to be buried underground



Specifications

Dimensions

Box No.	No. 0	No. 1	No. 2	No. 1 P.E.
A Over 2 Entries	117.0mm	131.5mm	168.0mm	129.5 mm
B Outer Diameter of Box	87.5mm	105.5mm	133.0mm	107.0 mm
C Lug Centres	98.5mm	124.0mm	147.3mm	124.0 mm
D Inner Diameter of Box	83.4mm	101.0mm	128.0mm	102.5 mm
E Internal Depth	41.7mm	45.0mm	54.0mm	45.0 mm
F Overall Height	54.0mm	58.6mm	71.5mm	58.6 mm
G Entry Thread	M20x1.5P	M20x1.5P	M32x1.5P	M25x1.5P
H Lug Co-ordinates	24.63mm	31.0mm	36.8mm	16.0
I Lug Co-ordinates	42.65mm	53.7mm	63.8mm	60.0

Cable boxes sizes & configurations See size selection chart

Box No.	Configuration	Cat. No.
No. 0	Two Way Through Box Three Way Right Angle Four Way Right Angle	08041 08042 08043
No. 1	Three Way Y-Type Parallel Four Way H-Type Parallel Two Way Through Box	08044 08045 08046
No. 1	Three Way Right Angle Four Way Right Angle	09056 09057
No. 2	Two Way Through Box Three Way Right Angle Four Way Right Angle	08047 08048 08049











4-Way H-type Parallel Box

4-Way Right Angle Box



Klik Lok (Non-Corrosive) IP68 Cable Junction Box



Features & Benefits

- Built-in Ex E cable glands
- Ex E and Ex N dual certified
- 5-Way box with 4 side entries:
- · 2 Side entries blanked off with plugs
- 2 Open side entries & 1 Drill-able bottom entry
- Revolutionary "Click Lock" lid design eliminates cross threading problems
- Domed lid for easy termination of conductors
- · Impact resistant and corrosion free
- Long lasting IP68 replaceable sealing gasket

- Patented, invertible cranked terminal rail ensures lots of space for insertion of conductors into Kwikblok terminals
- Integrated earth continuity between entries using patented earthing harness
- 4 Raised mounting feet prevents rocking on uneven surfaces.

Junction Box Dimensions

Α	Outer Diameter of Box	119.5mm
В	Internal Diameter of Box	99mm
С	Internal Depth	47.6mm
D	Overall Height of Box	86.5mm
Е	Entry Thread	M20 x 1.5p
F	Mounting Lug Centres	87mm
G	Base Width	97mm (square)




57284

Standard Brass Terminal



57286

Inverted Brass Terminal



Klik-Lok® Box fitted with Inverted Terminal Rail

Illustration shows inverted terminal rail and fitting of Pratley non-sparking end connectors with insulating sleeves. The inverted rail also facilitates earthing continuity with the bottom entry

Standard or inverted Brass Terminal Rail

Patented cranked terminal rail allows easy fitting of wires into connectors

Specifications SWA/PVC Cable Box Selection Chart

Cable Size	No. of Cores	Box Size Max.	Bedding Dia. (Hole Ø in box entry)
1.5mm ²	2, 3, 4, 5, 7	0	12.6mm
	12	1	15.7mm
	19	2	20.4mm
	27, 37	3	26.3mm
2.5mm ²	2, 3, 4, 5	0	12.6mm
	7	1	15.7mm
	12	2	20.4mm
	19, 27	3	26.3mm
	37	4	34.7mm

Cable Size	No. of Cores	Box Size Max.	Bedding Dia. (Hole Ø in box entry)
4mm ²	2, 3, 4	0	12.6mm
	5, 7	1	15.7mm
	12, 19	3	26.3mm
	27	4	34.7mm
	37	5	43.3mm
6mm ²	2	0	12.6mm
	3, 4, 5	1	15.7mm
	7	2	20.4mm
10mm ²	2, 3	1	15.7mm
	4	2	20.4mm
16mm ²	2	1	15.7mm
	3, 4	2	20.4mm

Cable Size	No. of Cores	Box Size Max.	Bedding Dia. (Hole Ø in box entry)
25mm ²	2	1	15.7mm
	3	2	20.4mm
	4	3	26.3mm
35mm ²	2	2	20.4mm
	3, 4	3	26.3mm
50mm ²	2	2	20.4mm
	3	3	26.3mm
	4	4	34.7mm
70mm ²	3, 4	4	20.4mm
95mm ²	3	4	34.7mm
	4	5	43.3mm
120mm ²	3	4	34.7mm
	4	5	43.3mm

This chart shows the maximum cable bedding diameter accommodated by each size of Junction Box.

NOTE: Cable Size, No of Cores and Box Size are based upon sizes published by cable manufacturers. Cable diameters do vary. To be 100% sure, physically measure the bedding size and then select the appropriate box.

Allum Alloy, Ezee Fit, Boxes for SWA/PVC Cable



Envirogland & Enviro Compression





Features & Benefits

- Unique hazardous Ex identification band "The Gland with a Band"
- · No special spanners
- Ultra Tough "WILL NOT CRACK when tightening!"
- High tensile brass internal components
- · Built in safety gauge
- Sizes 0-5 Enviro Compression Glands are dual certified for uses on all EE and Exd group II A and II B apparatus
- IP68 rated
- · Accessories available

Specifications

Gland Selection Chart - Envirogland

Gland Size		0	1	2	3	4	5	6	7
Catalogue No.		3200	3201	3202	3203	3204	3205	3206	3207
Diameter over cable bedding	min	12.6	15.7	20.4	26.3	34.7	43.3	55.8	67.5
	man	8.5	12.6	15.7	20.4	26.3	34.7	43.3	43.5
Overall cable diameter	min	18.6	22.0	27.3	33.5	43.2	53.5	67.2	79.0
	man	12.6	15.4	22.0	24.3	33.5	43.2	53.5	67.2

Gland Selection Chart Enviro Compression

Gland Size	00	0s	0	1	2	3	4	5	6	7
Catalogue No.	32109	32108	32100	32101	32102	32103	32104	32105	32106	32107
Diameter over min cable bedding man	4.0	4.0	8.0	12.6	15.7	20.4	26.3	67.5	43.3	55.8
	8.0	8.0	12.6	15.7	20.4	26.3	34.7	43.5	55.8	67.5

Accessories

End Connectors & Insulating Sleeves for Pratley Aluminium Alloy & Ezee-Fit Boxes



End Connectors & Insulating Sleeves for Pratley Aluminium Alloy & Ezee Fit Boxes. To obtain the correct connector size, the cable cores must not exceed capacity shown for each connector.

For example: 6mm 3 core SWA in a 3 way box would need 6mm x 3 cores = 18mm for each connection.

Three No, 2 connections would be required as the No. 2 connection has a capacity of 32mm.

Size	Core Capacity	Part No.
2	32mm	18110/19
3	70mm	18111/20
4	105mm	18112/21
5	140mm	18113/22
6	280mm	18114/23

Tufflon Blanking Plugs



For Pratley Aluminium Alloy & Ezee-Fit Boxes IP68. Provided for use on entries not required or may be required later, without affecting the IP68 watertight seal.

Size	Part No.			
0	57800			
1	57801			
2	57802			
3	57803			
4	57804			

Reducing Glands and Shrouds



For aluminium alloy boxes

Size	Part No.		
1-0	11062/35111		
2-0	11063/35211		
2-1	11064/35211		

For Ezee Fit boxes

Size	Part No.	Size	Part No.	Size	Part No.	
3-0	58300/35310	4-0	58400/35410	4-3	58430/35411	
3-1	58310/35310	4-1	58410/35410			
3-2	58320/35311	4-2	58420/35411			

The entries of larger boxes may be adapted for smaller cable by using a reducing gland and shroud.

Compression Conversion Kits






Where unarmoured cable is required. The kits are easily fitted to the boxes without affecting the IP68 seal.

For aluminium alloy boxes

Size	Cable Ra	Part No.	
	Min	Min Max	
0XS	3.0mm	5.9mm	67074
0S	6.0mm	9.4mm	67075
0L	9.5mm	12.6mm	67082
1S	12.7mm	14.3mm	67076
1L	15.8mm	15.7mm	67083
2S	20.5mm	17.3mm	67077
2L	17.4mm	20.4mm	67084

	Cable Ra	Part No.		
	Min	lin Max		
0XS	3.0mm	5.9mm	62000	
08	6.0mm	9.4mm	62001	
0L	9.5mm	12.6mm	62002	
1	12.7mm	15.7mm	62011	
2	15.8mm	20.4mm	62021	
3	20.5mm	26.3mm	62032	
4	26.4mm	34.7mm	62042	

Design & Combine light kits 30 - 56" Down Rods Remotes and Wall Controls

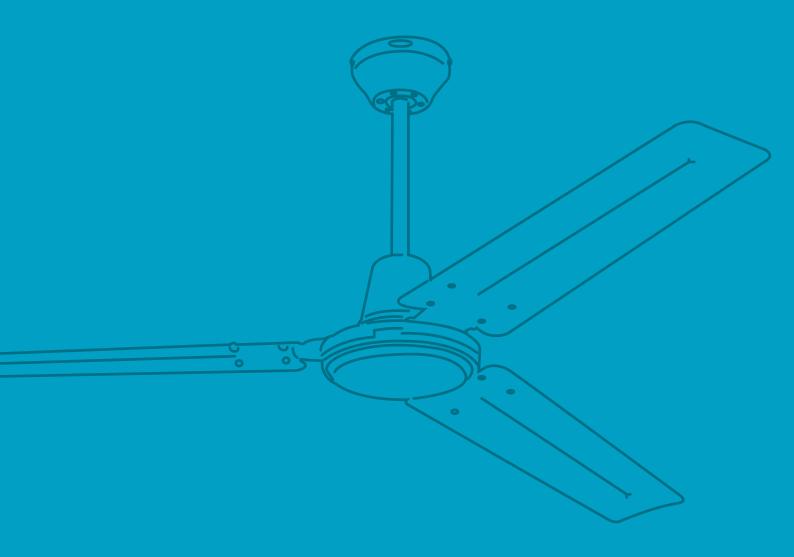



Full colour Westinghouse catalogue available on request.

Apollo - Design and Combine Collection (Instaloc)







77703

• Accessory for 72105

78531

• Accessory for 72105



Apollo 72105 42"/105cm (Instaloc)

- White Fan Finish
- White/Washed Pine Blade Finish
- Pitch 12°
- Dual Mount System *
- Light Kit Adaptable
- Remote Control Adaptable
- Wall Control Adaptable
- Including Reverse Switch



78534

• Accessory for 72105







• Accessory for 72122



78529

Accessory for 72122



78532

• Accessory for 72122



Apollo 72122 42"/105cm (Instaloc)

- Satin Brass Fan Finish
- Maple/Mahogany Blade Finish
- Pitch 12°
- Dual Mount System *



- Remote Control Adaptable
- Wall Control Adaptable
- Including Reverse Switch



78535


• Accessory for 72122

Specifications

Design and Combine

Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit



	Product Code	Α	В	С	D	E	F
	72105	31	32	6	23	13	38
	72122	31	32	6	23	13	38
	72123	31	32	6	23	13	38
ĺ	72406	31	32	6	23	13	38

Apollo - Design and Combine Collection (Instaloc)











77701

Accessory for 72123

78530

· Accessory for 72123

78533

Accessory for 72123

Apollo 72123 42"/105cm (Instaloc)

- Brushed Aluminium Fan Finish
- Light Maple/White Blade Finish
- Pitch 12°
- Dual Mount System *
- · Light Kit Adaptable
- Remote Control Adaptable
- · Wall Control Adaptable
- · Including Reverse Switch



78536

· Accessory for 72123



Apollo 72406 42"/105cm (Instaloc)

- Fan Finish
- · Wengue/Silver Blade Finish
- Pitch 12°



· Accessory for 72406



72407

Accessory for 72406



· Accessory for 72406

- Dark Pewter/Chrome
- Light Kit Adaptable • Remote Control Adaptable
- Wall Control Adaptable
- · Including Reverse Switch



· Accessory for 72406

Dimensions

Design and Combine Collection

Warranty: Ceiling fans backed by our 10 year extended manufacturers warranty on the motor.

- *Dual Mount System: Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.
- **Down Rod: When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30.5cm or 18"/46cm, see accessories.
- ***Hugger: This ceiling fan can not be installed with a Down Rod.



72020 Urban Gale NEW

52"/132cm

- Brushed Nickel Fan Finish
- Black Blade Finish, Pitch 15°
- Down Rod Only**
- Wall Control Included
- · Including Reverse Switch

Urban Gale 72021- 52"/132cm

72021 Urban Gale NEW

52"/132cm

- White Fan Finish
- White Blade Finish, Pitch 15°
- Down Rod Only**
- Wall Control IncludedIncluding Reverse Switch

Bendan 72140 - 52"/132cm

72140 Bendan NEW

52"/132cm

- White Fan Finish
- White Blades, Pitch 12°
- Single Disc Light Fixture with Opal Glass
- 1 X 80W, R7s Included
- Down Rod** Only
- Includes Remote Control and Reverse Switch



72154 Everett 52"/132cm

- Espresso Fan Finish
- Espresso/Applewood Blade Finish, Pitch 11°
- Single Light Fixture with Scavo Glass
- 2 X 60W, E27, ES not included
- Hugger ***
- Pull Chain Only
- Wall Control Adaptable
- Including Reverse Switch

Solana

72161 - 48"/122cm



72161 Solana 48"/122cm

- Brushed Nickel Fan Finish
- Wengue Blade Finish, Pitch 12°
- Down Rod**
- Single Light Fixture with Opal Frosted Glass
- 2 X 40W, E14, SES Not included
- Remote Control Included
- Including Reverse Switch

Vegas 72185 - 42"/105cm

72185 Vegas 42"/105cm

- White Fan Finish
- White/Washed Pine Blade Finish, Pitch 11°
- Dual Mount System *
- Single Light Fixture with Opal Glass
- 1 X 60 W, E 27, ES not included
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch





72220 Bendan 52"/132cm

- · Satin Chrome Fan Finish
- Silver Blades
- · Single Disc Light Fixture
- 1 X 80W, R7s (included)
- Down Rod Only**
- Includes Remote Control and Reverse Switch



72272 Vegas 42"/105cm

- Brushed Aluminium Fan Finish
- Light Maple/Silver Blade Finish, Pitch 11°
- Single Light Fixture with **Opal Glass**
- 1 X 60W, E27, ES not included
- Dual Mount System *
- Wall Control Adaptable
- Remote Control Adaptable
- · Including Reverse Switch



72268 Industrial 56"/142cm

- White Fan Finish
- White (Steel) Blade Finish, Pitch 8°
- Down Rod Only **
- · Wall Control Included
- Including Reverse Switch




72289 Jet 1 42"/105cm

- Brushed Nickel Fan Finish
- · Wengue/Silver Blade Finish, Pitch 14°
- Down Rod**
- Remote/Wall Control Adaptable

Specifications

Design and Combine



Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- **D** Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product						
Code	Α	В	С	D	Е	F
72020	45	38	6	20	13	-
72021	45	38	6	20	13	-
72140	26	31	6	26	13	38
72154	20	18	-	29	-	32
72161	30	28	5	19	16	36
72185	26	32	6	17	13	42
72220	26	31	6	26	13	38
72268	35	-	6	20	13	38
72272	26	32	6	17	13	42
72289	18	29	6	17	13	-

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.



72290 Jet Plus 42"/105cm

- · Brushed Nickel Fan Finish
- Wengue/Silver Blade Finish, Pitch 14°
- 3 Spot Light Fixture
- 3 X 40W, E14, RSO not included
- Down Rod**
- Remote Control Included
- · Including Reverse Switch

Jasmine 72368 - 42"/105cm



72368 Jasmine 42"/105cm

- Dark Pewter/Chrome Fan Finish
- Weathered Maple Blade Finish, Pitch 12°
- · Single Light Fixture with Mushroom Glass 1 X 60W, E27, ES not included
- Down Rod**
- Remote Control Included
- Including Reverse Switch



72415 Princess Radiance 36"/90cm

- Dark Pewter/Chrome
- Fan Finish
- Wengue/White Blade
- Finish, Pitch 18°
- Single Light Fixture with Dome Glass
- 1 X 60W, E 27,
- ES not included

- Dual Mount System*
- Remote/Wall
- Control Adaptable
- · Including Reverse Switch

Colosseum 72417 - 36"/90cm

72417 Colosseum NEW

36"/90cm

- Brushed Nickel Fan Finish
- Weathered Maple /Silver Blade Finish, Pitch 13°
- LED Light Fixture with **Opal Frosted Glass**
- 1 X 17W, Dimmable Integrated LED
- Dual Mount System*
- Remote Control Included
- · Including Reverse Switch

Industrial 72419 - 48"/122cm

72419 Industrial 48"/122cm

- · Satin Nickel Fan Finish
- · Satin (Steel) Blades
- Remote/Wall Control Adaptable
- Including Reverse Switch

Colosseum



72420 Colosseum NEW

36"/90cm

- · White Fan Finish
- White/Light Maple Blade Finish, Pitch 13°
- · LED Light Fixture with Opal Frosted Glass
- 1 X 17W, Dimmable Integrated LED
- Down Rod**
- Dual Mount System*
- Remote Control Included
- · Including Reverse Switch





72422 Mountain Gale

NEW 52"/132cm · Silver Fan Finish

Pitch 15°

- · Black Blade Finish,
- Down Rod Only**
- Remote Control Adaptable
- Including Reverse Switch
- IP44 Protection Class



72423 Mountain Gale

NEW 52"/132cm

- White Fan Finish
- · White Blade Finish, Pitch 13°
- Down Rod Only**
- Remote Control Adaptable
- Including Reverse Switch
- IP44 Protection Class

Flora Royale 72424 - 30"/76cm

72424 Flora Royale NEW

30"/76cm

- White Fan Finish
- White/Light Maple Blade Finish, Pitch 18°
- Single Light Fixture with **Opal Frosted Glass**
- 1 X E27 Max. 60W,
- Not Included
- Down Rod**
- · Remote/Wall Control Adaptable
- · Including Reverse Switch




72425 Princess Euro NEW

42"/105cm

- White Fan Finish
- White /Beech Blade Finish, Pitch 11°
- 3 Spot Light Fixture
- 3 X GU10, Each Max. 50W
- Down Rod**
- Remote/Wall
- Control Adaptable
- Including Reverse Switch

Specifications

Design and Combine



Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing C - Ceiling to Bottom of Canopy
- **D** Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product Code	Α	В	С	D	Е	F
72290	18	29	6	17	13	37
72368	30	31	6	22	13	42
72415	22	32	6	17	13	44
72417	26	30	6	19	13	38
72419	25	36	6	20	13	-
72420	26	30	6	19	13	38
72422	42	52	6	20	13	-
72423	42	52	6	20	13	-
72424	24	30	7	17	13	37
72425	27	33	6	17	13	40

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.



72471 Quince NEW

24"/60cm

- White Fan Finish
- White/Beech Blade Finish, Pitch 18°
- Single Light Fixture with Frosted Opal Glass
- 2 X E14, Each Max. 40W
- ES not included
- Down Rod Only**
- Remote Control Included
- Including Reverse Switch
- -



72485 Comet Tiffany 52"/132cm

- Espresso Fan Finish
- Wengue/Dark Cherry Blade Finish, Pitch 12°
- Single Light Fixture with Tiffany Bowl
- 3 X 60W, E14, SES not included
- Dual Mount System *
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Industrial 72501- 56"/142cm



72501 Industrial 56"/142cm

- Silver Fan Finish
- Silver Blade Finish, Pitch 8.5°
- Down Rod**
- Wall Control Included
- Remote Control Adaptable
- Including Reverse Switch

Celestia II

72505 - 48"/122cm



72505 Celestia II 48"/122cm

- Brushed Aluminium Fan Finish
- Graphite Blade Finish, Pitch 12
- Single Light Fixture with Opal Frosted Glass
- 2 X 11W, E27, Included
- Hugger*** Downrod Only
- Remote Control Included
- Including Reverse SwitchWall Control Adaptable

Celestia

72530 - 44"/112cm



72530 Celestia 44"/112cm

- Chrome Fan Finish
- Wengue Blade Finish, Pitch 12°
- Single Light Fixture with Opal Frosted Glass Bowl
- 2 X 11W, E27, CFL 3U Type Included
- Hugger***
- Remote Control Included
- Including Reverse Switch



72546 Havanna 52"/132cm

- Brushed Aluminium Fan Finish
- Silver/Graphite Blade Finish, Pitch 11°
- Single Disc Light Fixture
- 1 X 80W, R7, included
- Down Rod**
- Remote Control Included
- Including Reverse Switch
- Wall Control Adaptable



Bendan 72557 - 52"/132cm

72557 Bendan 52"/132cm

- Satin Chrome Fan Finish
- Wengue Blade Finish, Pitch 12°
- Single Disc Light Fixture
- 1 X 80W, R7, included
- Down Rod**
- Remote Control Included
- Including Reverse Switch
- Wall Control Adaptable



72559 Arius 52"/132cm

- Chrome Fan Finish
- White/Black Blade Finish, Pitch 12°
- 5 Light Fixture with Opal Glass
- 5 X 9W, E14, CFL not included 30 Type
- · Dual Mount System*
- Remote Control Included
- Including Reverse Switch
- Wall Control Adaptable

Bendan

72564 - 52"/132cm



72564 Bendan 52"/132cm

- Dark Pewter Fan Finish
- Applewood Blades
- Single Disc Light Fixture
 1 X 80W, R7s (included),
- Down Rod** Only

 Includes Remote Control and Reverse Switch




72598 Cumulus 48"/122cm

- White Fan Finish
- White/White Washed Pine Blade Finish, Pitch 12°
- 1 X 80W, R7'S
- Not Included
- Down Rod Only**
- Includes Remote Control
- Including Reverse Switch

Specifications

Design and Combine



Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product Code	Α	В	С	D	E	F
72471	23	27	6	17	13	31
72485	31	27	6	29	15	38
72501	44	50	6	19	13	-
72505	24	28	12	25	15	35
72530	23	27	12	25	15	35
72546	27	30	6	25	13	34
72557	26	31	6	26	13	38
72559	27	33	6	28	13	42
72564	26	31	6	26	13	38
72598	43	49	7	19	13	54

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.



72599 Lenerco 52"/132cm

- Chrome Fan Finish
- · Silver/Graphite Blade Finish, Pitch 12°
- 2 X 13W, E 27,
- Not Included
- Down Rod**Only
- Remote Control Included
- Including Reverse Switch

78001 Delancey 52"/132cm

Delancey 78001- 52"/132cm

- Brushed Chrome Fan Finish
- · Silver Blade Finish, Pitch 13°
- Down Rod**
- Single Light Fixture with **Opal Frosted Glass**
- Wall Control Adaptable
- Remote Control Included
- Including Reverse Switch



78006 Combo 52"/132cm

- Brushed Steel Fan Finish
- Catalpa Wood/ Walnut Blades
- Single Light Fixture with **Opal Frosted Glass**
- E27 (not included)
- Remote Control Included
- · Including Reverse Switch
- Dual Mount System*



78007 Lavada 48"/122cm

- Satin Chrome Finish
- Golden Maple/Weathered Maple Blades
- Opal Frosted Glass
- 1 X 80 W, R7s (included)
- Remote Control Included • Including Reverse Switch
- Single Light Fixture with



78008 Fantastic 52"/132cm

- Brushed Chrome Fan Finish
- Silver Blades
- Single Light Fixture with Opal Frosted Glass
- 1 X 75W LED Light kit, (not interchangeable)
- Remote Control Included
- · Including Reverse Switch



78010 Athena 42"/105cm

- · Antique Nickel Finish
- Walnut/Larch Blade
- · Single Light Fixture with Opal Frosted Glass
- 1 X 7.5W LED Light kit, (not interchangeable)
- Remote Control Included
- · Including Reverse Switch





78014 Hercules Supreme • 1 3 52"/132cm (ne

- Two Colour Fan Finish: Dark Pewter/Chrome
- Dark Walnut/ Applewood Blades
- Single Light Fixture with Opal Frosted Glass
- 1 X 7.5W LED Light kit, (not interchangeable)
- Remote Control Included
- · Including Reverse Switch

78017 Comet 52"/132cm

- White Finish
- White/Beech Blade Finish, Pitch 11°
- Single Light Fixture with Opal Frosted Glass
- 2 X 40W, E14,
 SES not included

Turbo Swirl 78158 - 30"/76cm

- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78065 Kingston 42"/105cm


- Brushed Aluminium Fan Finish
- Weathered Maple/Silver Blade Finish, Pitch 12°
- 3 Spot Light Fixture
- 3 X 50W, GU10 (Included),
- Dual Mount System*
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

78158 Turbo Swirl 30"/76cm

- Titanium Fan Finish
- Light Maple Blade Finish, Pitch 18°
- Single Opal Frosted Disc Light Fixture
- 1 X 60W, E14, SES, not included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Specifications

Design and Combine



Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product Code	Α	В	С	D	E	F
72599	28	32	5	20	15	41
78001	31	32	5	20	16	39
78006	33	36	6	21	15	44
	21	24	n/a	21	n/a	32
78007	21	30	5	20	15	33
78008	32	34	5	26	15	40
78010	32	-	6	18	13	46
78014	33	-	6	27	13	43
78017	31	-	6	29	15	38
78065	33	31	6	24	13	38
78158	19	28	6	17	13	38

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.



78171 Monarch Trio 52"/132cm

- · Polished Brass Fan Finish
- Oak Cane/Mahogany
- Blade Finish, Pitch 11°
- 3 Light Fixture with Frosted Glass
- 3 X 60W, E14, SES, not included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78174 Airplane 42"/105cm

- Silver Fan Finish
- Silver Blade Finish, Pitch 12°
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Comet 78182 - 52"/132cm

78182 Comet 52"/132cm

- Titanium Fan Finish
 Addition Black
- Light Maple/White Blade Finish, Pitch 11°
- Single Light Fixture
 With Opal Frosted Glass
- 2 X 40W, E14, SES, not included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78199 Princess Trio 42"/105cm

- Polished Brass Fan Finish
- Oak Cane/Mahogany Blade Finish, Pitch 11°
- 3 Light Fixture with Frosted Glass
- 3 X 60W, E14, SES, not included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78261 Jet II NEW

42"/105cm

- White Fan Finish
- White/Light Maple Blade Finish, Pitch 14°
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Industrial



78263 Industrial 48"/122cm

- Chrome Fan Finish
- Chrome Blade Finish, Pitch 14°
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78264 Nevada NEW

42"/105cm

- Iron Ancient Fan Finish
- Walnut/Cherry Blade Finish, Pitch 12°
- Dual Mount System*
- · Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78265 Princess Trio NEW

42"/105cm

- Ancient Brass Fan Finish
- Oak /Mahogany Blade Finish, Pitch 12°
 3 Light Fixture with

Frosted Glass

- 3 X E14, each max. 60W Not Included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Portland Ambiance EL



78266 Portland Ambiance EL NEW

42"/105cm

- Dark Pewter Fan Finish
- Weathered Maple/Silver Blade Finish, Pitch 12°
- Single Light Fixture With Opal Glass
- 1 X E27, max.
 60W Not Included
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch




78268 Monarch NEW

48"/122cm

- Titanium Fan Finish
- Titanium /Maple Blade Finish, Pitch 11°
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Specifications

Design and Combine



Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product Code	Α	В	С	D	E	F
78171	25	38	6	25	13	40
78174	25	38	6	25	13	40
78182	31	-	6	29	15	38
78199	23	32	6	17	13	46
78261	18	29	6,8	17	13	NA
78263	25	36	6	20	13	-
78264	30	34.5	6,8	24	13	-
78265	27.5	32	6	17	13	43
78266	20	30	6	17	13	43
78268	27.5	34	6	28	13	NA

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.



78269 Monarch 48"/122cm

- · White Fan Finish
- White/White Cane Blade Finish, Pitch 11°
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- · Including Reverse Switch



78274 Capitol NEW

42"/105cm

- Brushed Steel Fan Finish
- Silver/Black Blade Finish, Pitch 11°
- Single Light Fixture With Open Opal Glass
- 1 X E27, max.
 60W Not Included
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Techno 78270 - 52"/132cm

78270 Techo NEW

52"/132cm

- Titanium Fan Finish
- Titanium ABS Blades Pitch 13°
- 1 x 17.5W LED Light Kit (Not Interchangeable)
- Down Rod**
- Including Remote Control
- · Including Reverse Switch

LED Specifications

- Not dimmable
- 1200 lumens
- Colour Temp: 2700 Kelvin
- Energy Effeciency A+

Portland Amblance






78321 Portland Amblance 36"/90cm

- · Chrome Fan Finish
- White/Black Blade Finish, Pitch 11°
- Single Light Fixture with Mushroom Glass
- 1 X 60W, E27, ES, not included
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Specifications

Design and Combine



Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product Code	Α	В	С	D	Е	F
78269	25	38	6	25	13	40
78270	25	38	6	25	13	40
78274	31	-	6	29	15	38
78321	23	32	6	17	13	46

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.



Princess Trio



78324 Princess Trio 42"/105cm

- · White & Polished **Brass Finish**
- · White Cane/White Blades, Pitch 12°
- 3 Light Fixture with Frosted Glass
- 3 X 60W, E14, SES, not included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- · Including Reverse Switch

Industrial



78337 Industrial

48"/122cm

- · White Fan Finish
- · White Blade Finish, Pitch 11°
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Cyclone 78370 - 52"/132cm

78370 Cyclone 52"/132cm

- Brushed Steel Fan Finish
- · Black/Black with Silver Stripe Blade Finish, Pitch 12°
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Pearl




78425 Pearl 42"/105cm

- Stainless Steel Fan Finish
- Light Maple/White Blades, Pitch 12°
- 3 Spot Light Fixture
- 3 X 50W, GU10, Included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable • Including Reverse Switch

Specifications

Design and Combine



Dimensions Ke	Эy
---------------	----

- A Ceiling to Bottom of Blade
- **B** Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product Code	Α	В	С	D	Е	F
78324	23	32	6	17	13	46
78337	25	37	6	20	13	-
78370	29	34	6	28	13	-
78425	28	30	6	19	13	38

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.



78525 Audubon 48"/122cm

- Brushed Nickel Fan Finish
- Weathered Maple/Silver Blade Finish, Pitch 12°
- · 3 Spot Light Fixture
- 3 X 50W, GU10, included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78545 Hercules 52"/132cm

- Brushed Nickel Fan Finish
- Beech/Weathered Maple
- Blade Finish, Pitch 12°
- Single Disc Light Fixture1 X 80W, R7, included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch

Princess Euro



78622 Princess Euro 42"/105cm

- Dark Pewter/Chrome Fan Finish
- Silver/Graphite Blade Finish, Pitch 11°
- 3 Spot Light Fixture
- 3 X 50W, GU10, included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78623 Industrial 56"/142cm

- Espresso Fan Finish
- Espresso Blade Finish, Pitch 8.5°
- Down Rod**
- Including Reverse Switch & Wall Control
- Remote Control Adaptable

Quince 78631 - 24"/60cm

NEW 78631 Quince

24"/60cm

- Chrome Fan Finish
- Wengue/Beech Blade Finish, Pitch 18°
- Single Light Fixture with Frosted Glass
- 2 X E14, Each Max. 40W Not Included
- Down Rod Only**
- Remote Control Adaptable
- Wall Control Adaptable
- Including Reverse Switch

Turbo II 78673 - 30"/76cm

78673 Turbo II 30"/76cm

- White Finish
- 1 Set Multi Colours
- 1 Set Maple/White Finish, Pitch 18°
- Single Light Fixture with Frosted Glass
- 1 X 60W, E14, SES, Not included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
 Adaptable
- Including Reverse Switch





78753 Helix Fusion 52"/132cm

- · Chrome Fan Finish
- White/Black Blade Finish, Pitch 12°
- 4 Light Fixture
- 4 X 33W, G9, included.
- White and Black Glasses Included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78763 Wengue 30"/76cm

- Chrome Fan Finish
- Wengue/Beech Blade Finish, Pitch 18°
- Single Light Fixture with Opal Glass
- 1 X 80W, R7s included
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch



78764 Alloy 42"/105cm

- Gun Metal Fan Finish
- Black/Graphite Blade
- Finish, Pitch 14°
- Single Light Fixture with
- Opal Glass
- 1 X 80W, R7, included
- Down Rod**
- Wall Control Adaptable
- Remote Control Adaptable
- Including Reverse Switch




78788 Flora Royale 30"/76cm

- Satin Chrome Fan Finish
- Salir Chrome Fair Finish
 Silver/White Blade Finish, Pitch 18°
- Single Light Fixture with Opal Glass
- 1 X 60W, E27, Es, not included
- Dual Mount System*
- Wall Control Adaptable
- Remote Control AdaptableIncluding Reverse Switch

Specifications

Design and Combine



Dimensions Key

- A Ceiling to Bottom of Blade
- B Ceiling to Bottom of Switch Housing
- C Ceiling to Bottom of Canopy
- D Width of Motor Housing
- E Width of Canopy
- F Ceiling to Bottom of Light Kit

Product Code	А	В	С	D	Е	F
78525	29	30	6	22	13	39
78545	34	-	6	27	13	41
78622	26	31	6	17	13	40
78623	44	50	6	19	13	-
78631	23	27	6	17	13	31
78673	19	28	6	17	13	38
78753	26	30	6	27	13	44
78763	23	26	6	17	13	31
78764	18	28	6	17	13	30
78788	22	-	6	17	13	38

*Dual Mount System:

Please note, that the rod which is included into the packaging, does not need to be installed with this ceiling fan. If you want to reach a closer distance from the blades/light fixture to the ceiling, the rod can be left out.

**Down Rod:

When installing the ceiling fan, please be aware, that the rod which is included has to be installed with the fan. Alternatively, you can also replace the smaller rod with a Down Rod of a length between 12"/30,5cm or 18"/46cm, see accessories.

***Hugger:

This ceiling fan can not be installed with a Down Rod.

Remotes and Wall Controls

Remotes



Infrared Remote Control 78792

- Suitable for all Ceiling Fans (Except Hugger Models)
- On/Off Switch for Rotation, Three Speed Levels
- On/Off Switch for Light, with Dimmer Function
- Battery-Operated (2 AA Batteries, not included)
- Receiver and Wall Bracket included



NEW Infrared Remote Control

77843

- Suitable for all Ceiling Fans (Except Hugger Models)
- On/Off Switch for Rotation, Four Speed Levels
- On/Off Switch for Light, no Dimmer Function
- Battery-Operated (2 AAA 1.5V Batteries, not included)
- Receiver and Wall Bracket Included



NEW Radio-Frequency Remote

77841

- Suitable for all Ceiling Fans (Except Hugger Models)
- On/Off Switch for Rotation, Four Speed Levels
- On/Off Switch for Light, no Dimmer Function
- Timer Function
- Touchscreen Operation
- Battery-Operated (4 AAA 1.5V Batteries, not included)
- Receiver and Wall Bracket included



NEW Radio-Frequency Remote

77874

- Suitable for all Ceiling Fans (Except Hugger Models)
- On/Off Switch for Rotation, Four Speed Levels
- On/Off Switch for Light, no Dimmer Function
- Temperature Timer and Clock Timer Included
- LCD Display
- Battery-Operated (4 AAA1.5V Batteries, not included)
- Receiver and Wall Bracket included

Wall Controls



Wall Control 78800

- Suitable for all Westinghouse Ceiling Fans
- 4 Speed and Off Control for Fan




Wall Control 78801

- Suitable for all Westinghouse Ceiling Fans
- 4 Speed and Off Control for Fan
- On/Off Control for Light

Down Rods





Down Rod Easy Connection



65643

- Silver
- 30.5cm/12"

65644

- Silver
- 46cm/18"



65646

- Satin Chrome
- 30.5cm/12"

65647

- Satin Chrome
- 46cm/18"



65649

- Brushed Nickel
- 30.5cm/12"

65650

- Brushed Nickel
- 46cm/18"



65763

- Dark Pewter
- 30.5cm/12"

65764

- Dark Pewter
- 46cm/18"



78864

- Antique Brass
- 30.5cm/12"

78865

- Antique Brass
- 46cm/18"



78867

- Brushed Aluminum
- 30.5cm/12"

78868

- Brushed Aluminum
- 46cm/18"



78870

- Titanium
- 30.5cm/12"

78871

- Titanium
- 46cm/18"



78876

- White
- 30.5cm/12"

78877

- White
- 46cm/18"



78882

- Polished Brass
- 30.5cm/12"

78883

- Polished Brass
- 46cm/18"



78885

- Chrome
- 30.5cm/12"

78886

- Chrome
- 46cm/18"



78888

- Satin Brass
- 30.5cm/12"

78889

- Satin Brass
- 46cm/18"

Floor Fans



Yucon I



72715 Yucon I

- Black/Silver Fan Finish
- Metal Housing, Grille and Stand
- Blade Material ABS Plastic
- Oscillation Angle up to 80°
- Basket/Blade Diameter: 55/50cm
- Maximum Height: 135cm
- Height Adjustable up to 28cm
- Manual Control

Yucon II



72716 Yucon li

- Black/Silver Fan Finish
- Metal Housing, Grille and Stand
- Blade Material ABS Plastic
- Basket/Blade Diameter: 53.5/50cm
- Maximum Height: 60cm
- Manual Control

Highland



72723 Highland

- Anthracite Fan Finish
- Plastic Housing, Grille and Stand
- Blade Material ABS Plastic
- Oscillation Angle up to 80°
- Maximum Height: 120cm
- Diameter: 13cm
- Remote (Included) or Manual Control

Silver Stream

72421 - 16"/40,6cm







NEW 72421 Silver Stream


16"/40,6cm

- Chrome Finish
- Stainless Steel Blades

Silver Stream Dimensions

Mounting Option	ng Basket (Grille) Width/De Diameter		Height
Desktop	45 cm	52 cm	64 cm
Wall Mount	45 cm	52 cm	45 cm
Floor Stand	45 cm	52 cm	95-128 cm

Notes

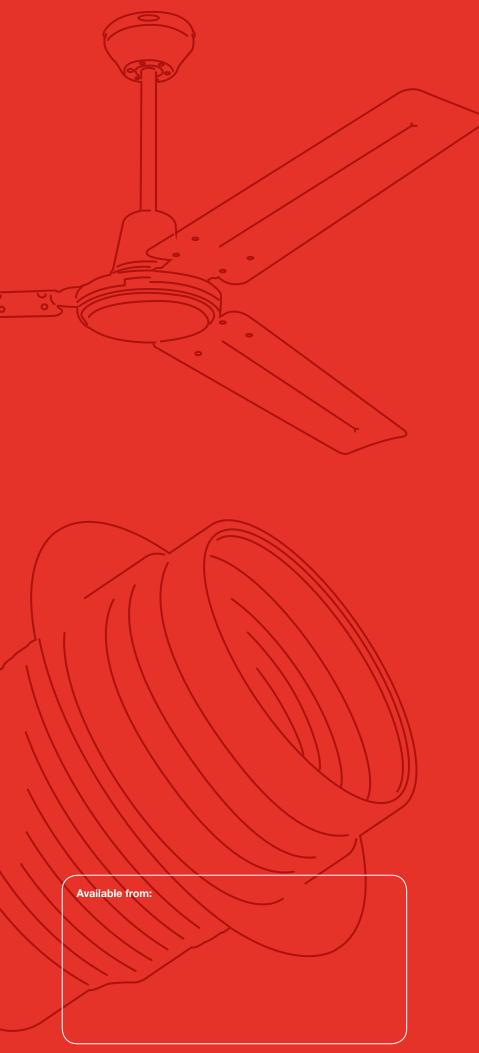

Authorised UK Distributor for: Pratley & Westinghouse
Copyright 2017 Jeani Accessories Limited. Subject to change without notice. E & OE



Contact us: Castle Lane, Melbourne Derby, DE73 8JB

t: 01332 865055 f: 01332 865056 e: sales@jeani.co.uk

Issue 01